

P/N: CL-60F010W12-5050-F1





1. Package Size: 5050 smd Type LED

Led 軟條燈:60 燈 / 100 cm

Electro-Optical Characteristics (TSoldering=25°C)

5050 White LED


Parameter	Symbol	Min.	Typ.	Max.	UNIT
Color Temperature	CCT	----	5000	----	K
Spectral Line Half-Width	$\Delta\lambda_{1/2}$	29	----	----	nm
Capacitance	C	30	----	----	PF
Forward Voltage	VF	----	3	---	V
Reverse Current	IR	----	----	10	uA
Luminous Intensity	Iv	----	18	----	lm
Viewing Angle	2 θ 1/2	----	120	----	deg

防水方式	 不防水	 滴膠	 套管	 全套管抽膠
公司代碼	F0	F1	F2	F3
防水等級	IP20	IP65	IP67	IP68


型号	CL-60F010W12-5050				
功率 (W/米)	电压 (V)	板宽 (mm)	PCB 颜色	光通量(lm)	光效(lm/W)
14.4	12	10	白	1200	85



PACKAGE DIMENSIONS

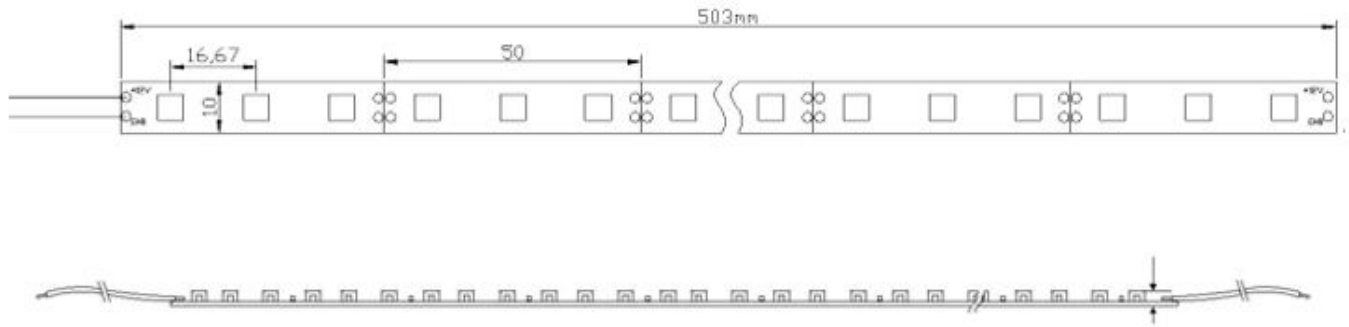

5050 60LEDs

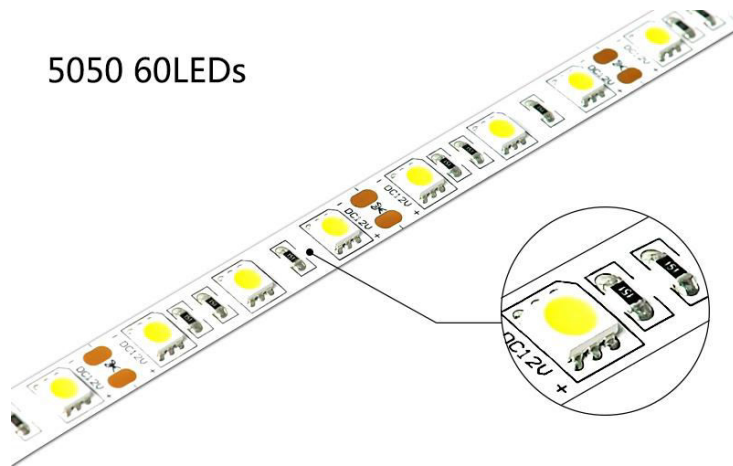

Notes :

1. Dimensions are in millimeters.
2. Tolerance is $\pm 0.25\text{mm}$ without noted.